

# IP 600

## innovaphone IP DECT

With the IP 600 system, DECT-based, cordless telephones can be integrated into the innovaphone PBX.

It is a combined device with DECT Gateway and DECT base station in one housing.

### *innovaphone PBX*

*In use with various other innovaphone products the innovaphone PBX offers solutions for small offices or home offices up to giant scenarios with up to 20.000 end devices.*



### Interoperability

the gateway is entirely H.323 standard compliant. On the part of DECT the gateway supports the established GAP standard and thus provides interoperability with a wide range of end devices. In use with IP 600 the innovaphone DECT handsets IP 52 and IP 54 offer perfect functionality.

### Centralized User Administration

All subscribers are being administrated within the innovaphone PBX. Thus, it is easy to handle multiple IP and DECT device registrations, i.e. subscribers can be registered on both an IP phone and a DECT handset. So they can use either of them at any time.




## Parameters

Up to 35 subscribers can be registered to the system and up to 6 simultaneous calls can be handled. DECT repeaters can expand the DECT devices' range.

For further information on IP 600, please consult the Technical Data sheet or visit our Website

## Range

The IP 600 system is DECT compliant and so usual DECT system ranges can be achieved. In addition, a repeater can even expand the range. Repeaters receive the base station signal and amplify its reproduction. Thus, up to 3 repeaters connected in a row can cover a long distance range.

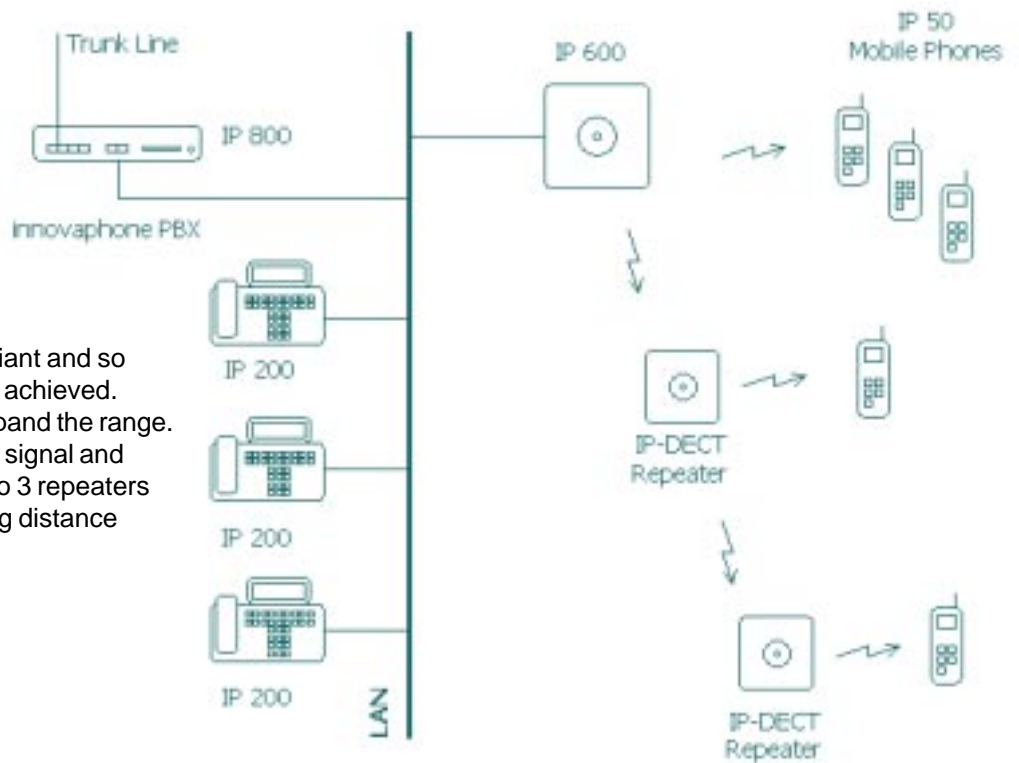

Copyright © 2004 innovaphone® AG

innovaphone® AG  
Böblinger Straße 76  
71065 Sindelfingen  
Germany  
Tel +49 7031 73009-0  
Fax +49 7031 73009-99  
e-mail: info@innovaphone.com